


## Summary

- Altera Cyclone IV
- Altera 484 Pins  
Options:  
CE30,55,75,115
- Compatible upgrade  
of Alphi IP-Cyclone II
- 64 Mbytes DDR
- SRAM is dual ported
- Separate logic for the  
IP interface
- Reconfigurable I/O
- RS-422/485 drivers
- User configurable IO  
by groups of 4, 2 pair
- 120 ohm termination  
software programmable
- Programmable via IP  
bus or bit/byte blaster
- Local serial EPROM
- Internal / External  
clock
- 8/32 Mhz IP clock  
support
- Vita 4 compliant



## USER RECONFIGURABLE ALTERA CYCLONE IV 64MBYTES DUAL-PORTED DDR RS-422/485 I/O DRIVERS

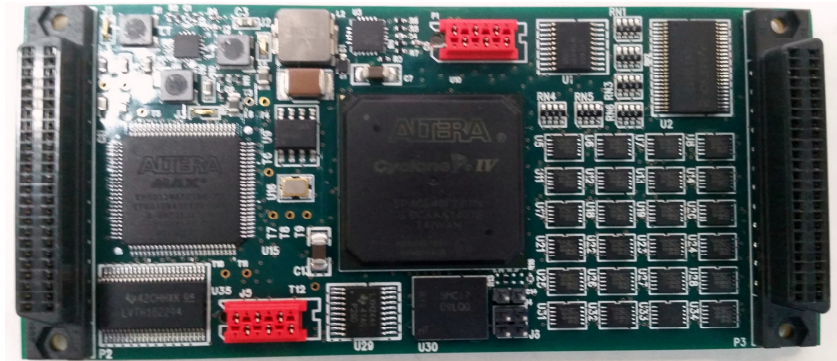

IP-CIV

### Features

- Altera Cyclone IV FPGA  
EP4CE30, 55, 75,115
- Stand alone possibility
- Single wide Industry Pack
- 20 Mbps RS485
- Logic-Selectable 120Ω  
Termination Resistor
- Optional User clock oscillator

### Memory

- 64 Mbyte external DDR
- Dual ported between the  
Altera and IP bus with  
arbitration

### I/O Level

- 24 pair RS-422/485
- 20 Mbps RS485
- High Input Impedance  
Supports 256 Nodes
- Software-Selectable, Half-  
/Full-Duplex
- Enhanced ESD protection  
allows to withstand ±15kV
- Logic-Selectable 120Ω  
Termination Resistor

### CycloneIV Programmable via

- Bit / Byte Blaster
- Serial EPROM
- IP Bus

### IP interface


- 8/32 Mhz clock
- 16 bit address
- Interrupts

### Operating: Environmental

- Operating temperature  
Commercial: 0 to +55 °C  
Optional: -40°C to +85°C
- Airflow requirement: .5 CFM
- Humidity: 5 to 90% (non-cond.)
- Altitude: 0 to 10'000 ft

### Mechanical: Environmental

- Size: Vita 4 Type 1 IP  
1.8" x 3.9"
- Power: 1 watt
- Vibration: 0.5G RMS  
20-2000 Hz rand
- Shock: 20 G, 11 ms, ½ sine
- Weight: tbd
- MTBF: >250000 hours

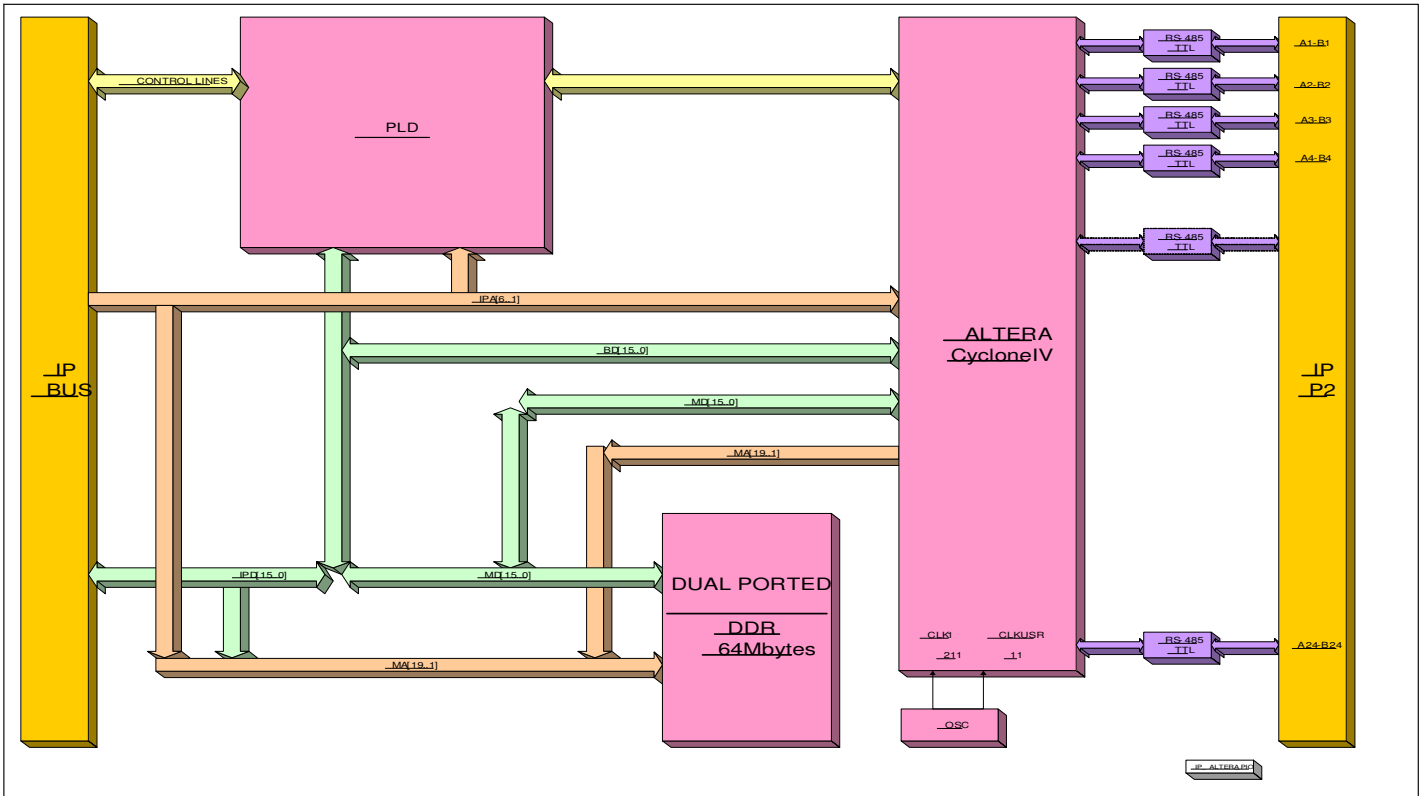

### Ordering Information

Part Number :  
 IP-CIV-CE30-x      RS-485/422 ALTERA EP4CE30 Industry Pack module  
 IP-CIV-CE55-x      RS-485/422 ALTERA EP4CE55 Industry Pack module  
 IP-CIV-CE75-x      RS-485/422 ALTERA EP4CE75 Industry Pack module  
 IP-CIV-CE115 -x    RS-485/422 ALTERA EP4CE115 Industry Pack module  
                   -x        : C    Commercial : 0°C to 70°C  
                                   : I    Industrial : -40°C to 85°C

### Optional Accessories

Part Number :      TB-50-HDR                              50 pin terminal block and 1meter flat ribbon cable  
 Part Number :      CBL-50-HDR                             50 pin,1meter flat ribbon cable, IDC header connector

### Alphi Technology Corporation

1898 E. Southern Ave.,  
 Tempe, Arizona 85282, USA  
 Tel: (480) 838 2428  
 Fax: (480) 838 4477

834-11-001-4100

For ordering information: [sales@alphitech.com](mailto:sales@alphitech.com) Please visit our web site at [www.alphitech.com](http://www.alphitech.com)