

Summary

The new CPCI-6713-ISC8 module provides a 3U high performance multi protocol serial controller, that supports RS-232, RS-422/485, TTL and user I/O configurations. The CPCI-ISC8 supports Synchronous, ASynchronous, bi-sync, Xon/Xoff, SDLC and HDLC communication modes. The Local DSP can be used to simply move data to and from the CPCI bus or provide pre processing and custom protocol functions. Custom application software can be downloaded to the DSP via the CompactPCI bus.

The TMS320C67x DSP generation is supported by the TI eXpressDSP™ set of industry development tools, including a highly optimizing C/C++ Compiler, the Code Composer Studio™ Integrated Development Environment (IDE), JTAG-based emulation, real-time debugging, and the DSP/BIOS™ kernel.

Available Drivers :

- Labview
- Linux
- Window XP



CPCI 320C6713 DSP OCTAL SERIAL CONTROLLER



CPCI-6713-ISC8

Board Features:

8 Serial channels
Zilog 85230 controllers
Mezzanine I/O module for RS-232/422/485 or user I/O
3.3 / 5 Volt via PLX 9056 33/66MHz
High Performance (DSP):
TMS320C6713B, 300MHz
Up to 32Mbytes of SDRAM
4.0 Mbit flash memory for bootstrap program

DSP Specifications:

TMS320C6713B™ DSP @ 300 Mhz
64K-Byte L2 Unified Cache/Mapped RAM, and 192K-Byte Additional L2 Mapped RAM
Dual 32 bit general purpose timers
16 channel EDMA 'Enhanced DMA'
16-bit Host-Port Interface (HPI)

CPCI Bus:


CPCI Bus Interface 3.3 / 5 Volt
PLX 9056 33/66MHz 32-bit, PCI r2.2 compliant
3.3V I/O, 5V tolerant bus interfaces

Debug Port:

JTAG emulator port
On board RS-232 header

I/O panel connectors:

Front Panel
(2) X 50 pin HRS for I/O

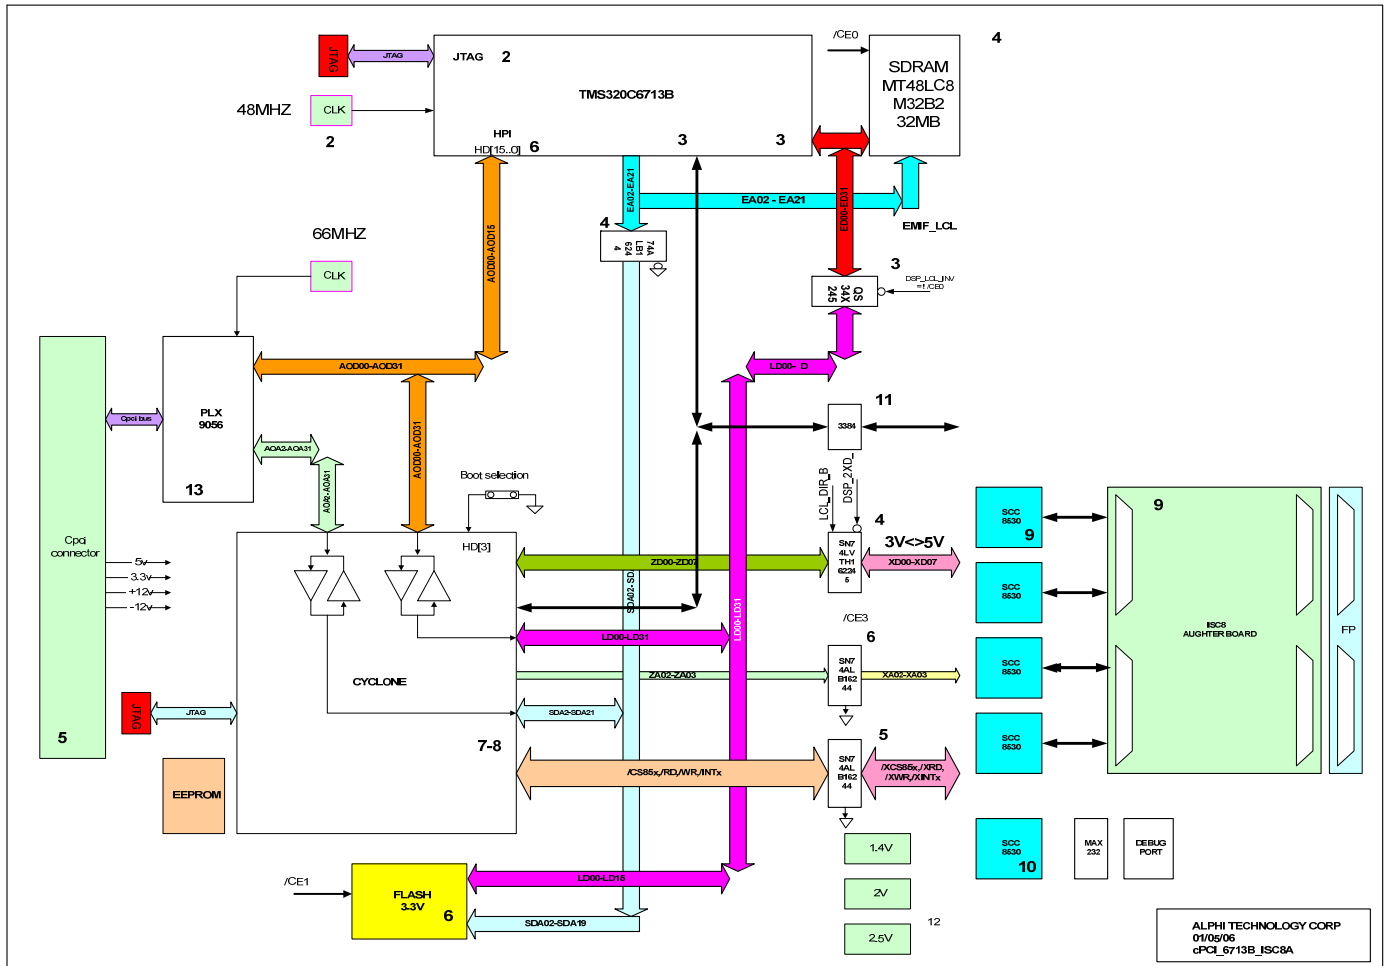

Functional Block Diagram

Mechanical & Environmental

- Operating temp. 0 to +55 °C Airflow requirement: 10 CFM
- Humidity: 5 to 90% (non-cond.)
- Altitude: 0 to 10'000 ft
- Full size PCI card
- Front panel I/O
- Power: +5v 1 amp, +12v 1 amp
- Vibration: 0.5G RMS 20-2KHz rand
- Shock: 20 G, 11 ms, ½ sine
- Weight: 2 lbs
- MTBF: >17200 hour

Ordering Information	
CPCI-6713-ISC8	3U CPCI 8 channel serial controller with 320C6713 DSP
CBL-50-HRS	Cable
TB-50-HRS	Terminal Block

Alphi Technology Corporation
 1898 E. Southern Ave.
 Tempe, Arizona 85282, USA
 Tel: (480) 838 2428
 Fax: (480) 838 4477

For ordering information: sales@alphitech.com Please visit our web site at www.alphitech.com