

Summary

The AD-48ADM16 offers a mix of up to 48 single ended or 24 differential multiplexed analog input channels. Each channel features programmable gain and can be individually programmed as single-ended or differential.

The acquisition can be started by the host or by an on board sequencer that uses a channel list to specify which channel to acquire and a local 128 Kbyte dual ported SRAM to store the acquisition data.


The A/D converter can provide a global acquisition and conversion time of less than 2 μ s per sample per channel. With channel and/or gain change, the acquisition time increases to less than 8 μ s.

The programmable internal sample clock offers sampling rates between 2 μ s and 32 seconds intervals.

Interrupts are associated with a selectable level of data in the sampling memory allowing continuous sampling and optimum reads of the data ram.



High Density 48 channel, 16 bit A/D Converter

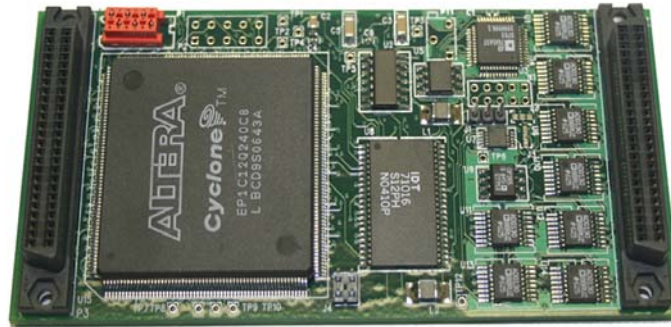

IP-AD48M-16

Features

- Mix of up to 48 single-ended or 24 differential channels
- On-board voltage reference
- Fault and Over-voltage Protected (-40 V, + 55 V) multiplexer
- 1 MSPS 16-bit A/D converter
- Software programmable single-ended (SE) or differential (DIFF) input and gain for each channel
- Input Ranges: - \pm 10V, \pm 5V, \pm 2.5V, \pm 1.25V using a software programmable gain amplifier
- Additional jumper selectable gain from A/D converter(1-2-4-8)
- Acquisition time \leq 2 μ s without gain and channel change
- Internal sequencer with channel list for acquisition of selected channels
- 64k x 16 Data dual ported storage SRAM
- DMA capable
- Programmable Interrupt
- Flash EEPROM for gain/offset correction data
- On board input switches for offset or gain calibration

Applications

- Process Control and Industrial Automation
- Precision Instrumentation

- Automatic Test Equipment

IP interface

- Compatible with Industry Pack Bus specification
- Identification EEPROM
- 8/32 MHz clock
- 16-bit data



Operating: Environmental

- Operating temperature
 Commercial: 0 to +70 $^{\circ}$ C
 Optional: -25 $^{\circ}$ C to +80 $^{\circ}$ C
- Non-operating: -40 $^{\circ}$ C to 85 $^{\circ}$ C
- Airflow requirement: .5 CFM
- Humidity: 5 to 90% (non-condensing.)
- Altitude: 0 to 10'000 ft

Mechanical: Environmental

- Size: Single size Industry Pack:
 Vita 4 Type 1 IP
 1.8" x 3.9"
- Power: tbd
- Vibration: 0.5G RMS
 20-2000 Hz rand
- Shock: 20 G, 11 ms, $\frac{1}{2}$ sine
- Weight: tbd
- MTBF: >110000 hours

IP-AD48M-16

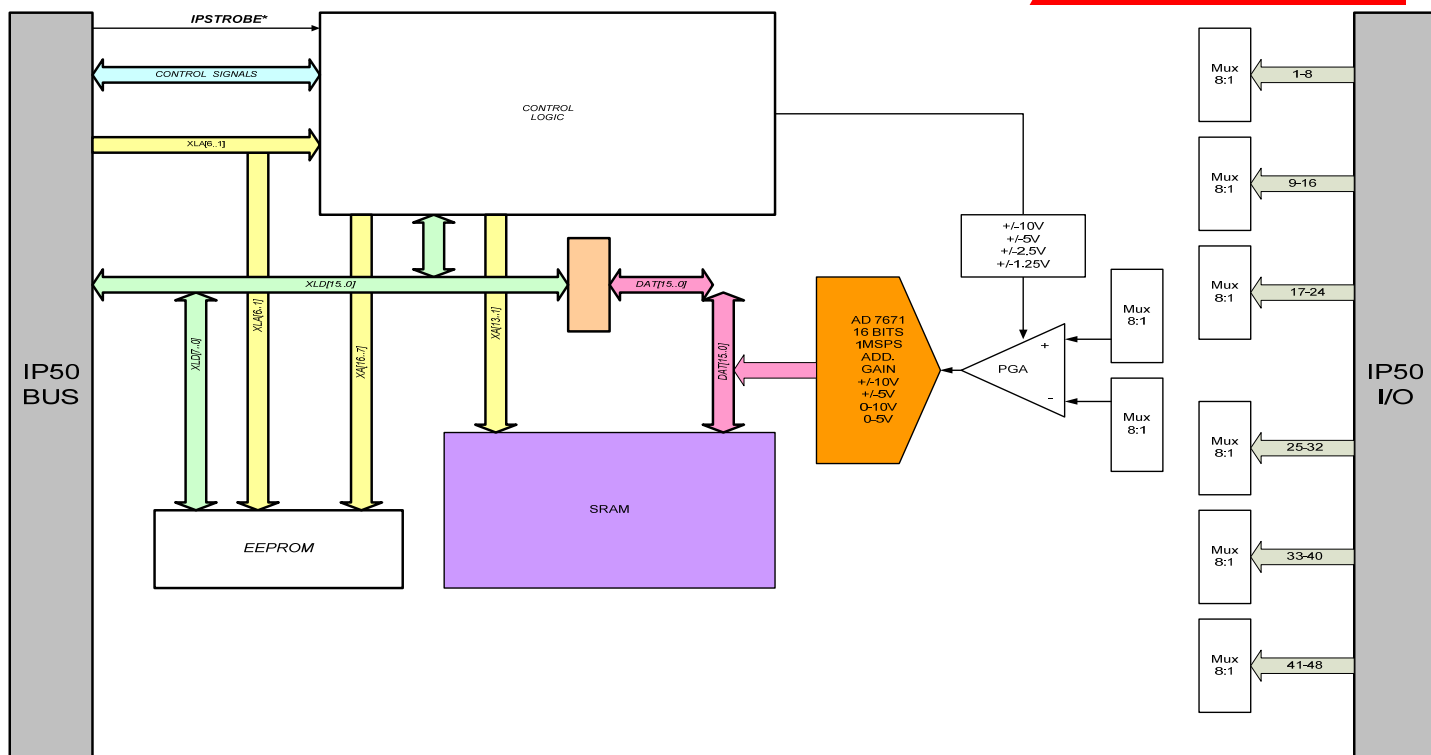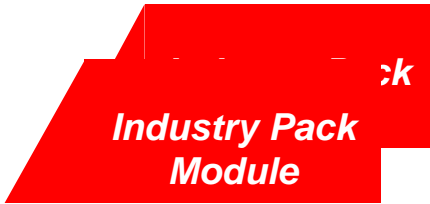

Functional Block Diagram

ORDERING INFORMATION

Part Number: IP-48ADM16 48 channel 16 bit A/D Industry Pack Module
 IP-8ADM16 8 channel 16 bit A/D Industry Pack Module
 IP-48ADM16-I Same as above with -40 to +85 C

Optional Accessories

Part Number: TB-50-HDR 50 pin terminal block and 1meter flat ribbon cable
 CBL-50-HDR 50 pin, 1meter flat ribbon cable, IDC header connector

Alphi Technology Corporation
 6202 South Maple Ave, Suite 120
 Tempe, Arizona 85283, USA
 Tel: (480) 838 2428
 Fax: (480) 838 4477

For ordering information: sales@alphitech.com Please visit our web site at www.alphitech.com