

Single/Dual UTMC μ MMIT DXE 1553 Controller


Features

- 1 or 2 controller of dual redundant (A/B channel) 1553 communications
- Programmable bus controller, remote terminal, or monitor terminal modes
- MIL-STD-1553 A and B compliant, Notice 2 RT
- Long or short stub support
- Low power consumption
- PCIMG compliant
- +3.3V or +5 VDC VIO
- LED status
- Selectable external or internal clock



Block Diagram Overview

The PCI-1553-x-PLX-SB uses a single UTMC's Summit DXE UT69151DXE-GPC 1553 communication device as its 1553 bus controller, or remote terminal, or monitor terminal. The single controller has two redundant channels. This controller accesses 64Kx16 word of external memory and has internal transceivers for both channel A and B. The PCI board has on-board transformers for both channels.

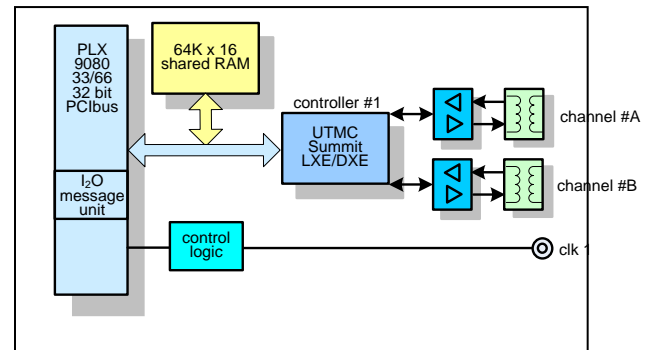

Available Software Drivers:

- C library dll's
- Linux drivers
- Window XP drivers
- VxWorks drivers

Applications:

This is a perfect solution for a wide array of 1553 communication applications such as:

- Test equipment supporting evaluation, simulation, monitoring, and analysis,
- Operational equipment such as avionics, space satellite systems, aircraft onboard systems, commercial systems, etc.
- Applications that require dual functionality of the terminal for monitoring and remote operation at the same time

1553 Compliance/Characteristics:

- Data Rate – 1 MHz
- Word Length – 20 bits
- Data Bits/Word – 16 bits
- Message Length – maximum of 32 data words
- Transmission Technique – half-duplex
- Operation – asynchronous
- Transmission encoding – Manchester II, bi-phase
- Protocol – command/response
- Bus Control – single or multiple
- Fault tolerance – typically dual redundant, second bus in “hot backup” status
- Message formats – controller to terminal, terminal to controller, terminal to terminal, broadcast, system control
- Number of remote terminals – maximum 31
- Terminal Types – remote terminal, bus controller, bus monitor
- Transmission Media – twisted shielded pair
- Coupling – transformer and direct

UTMC/Summit /DXE Features:

- Integrated transceivers
- RT mode internal command illegalization
- 16-bit read/write time-tag with user-defined resolution
- Sub-address data buffering
- Simultaneous RT/MT mode of operation
- BC architecture designed with:
 - Minor frame timing
 - Efficient command block flow statements
 - Status word polling
 - Programmable retries
- Programmable interrupt architecture
- Autonomous operation in all three modes

PCI Bus:

- PCI Bus Interface 3.3VDC/5VDC
- PLX 9080 33/66MHz 32-bit, PCI r2.2 compliant
- 3.3V I/O, 5V tolerant bus interfaces
- PICMG 2.1 r2.0 hot swap
- Zero wait state burst operation, with PCI bus bursts to 264 MB/sec and local bus bursts to 264 MB/sec
- 2 DMA channels
- Direct master data transfers
- Direct slave data transfers
- 33 MHz clock
- 16-bit address
- 16-bit data
- FIFO support burst operations

PCI Bus Control:

- I²O r1.5 messaging unit
- 8 mailboxes and 32 doorbell registers
- PCI arbiter supports 7 external masters
- Host mode reset/interrupt
- Big endian/little endian conversions
- Power management event generation support
- Serial EEPROM interface
- JTAG boundary scan, RS-232 RJ45

Operating Environment:

- Operating temperature
 - Commercial: 0 to +70 °C
 - Industrial : -40 °C to +85 °C
- Non-operating: -45 °C to +95 °C
- Airflow requirement – 5 CFM
- Humidity – 5 to 90% (non-cond)
- Altitude – 0 to 10,000 feet



Mechanical: Environmental:

- Size – ½ PCI card
- Power – 1.5 watt
- Front panel or rear panel I/O
- Vibration – 0.5G, 20-2000 Hz rand
- Shock – 20G, 11 msec, ½ sine
- Weight – tbd
- MTBF – >250,000 hours

Terminal Electrical Input Characteristics:

Requirements	Transformer coupled	Direct Coupled
Input level ¹	0.866-14.0V	1.2-20.0V
No response ¹	0.0-0.2V	0.0-0.28V
Zero crossing stability	+/-150.0 nSec	+/_ 150.0 nSec
Rise/fall times	0 nsec – Sine	0 nsec – Sine
Noise rejection ²	140 mV WGN	200 mV WGN
Common mode rejection ³	+/- 10.0V peak	+/- 10.0V peak
IInput impedance ⁴	1000 ohms	2000 ohms

Notes on measurement conditions:

1. p-p, I-I
2. BER 1 per 10⁷
3. Line-ground DC-2 MHz
4. 75 KHz-1MHz

Terminal Electrical Output Characteristics:

Requirements	Transformer coupled	Direct Coupled
Output level ¹	18.0-27.0V	6.0-9.0V
Zero crossing stability	25.0 nsec	25.0 nsec
Rise/fall ²	100-300 nsec	100-300 nsec
Max distortion ³	+/-900.0 mV	+/- 300.0 mV
Max output noise ⁴	14.0 mV	5.0 mV
Max residual voltage ³	+/-250.0 mV	+/-90.0 mV

Notes on measurement conditions:

1. p-p, I-I
2. 10%-90%
3. peak, I-I
4. rms, I-I

Ordering Information:

PCI-1553-1-PLX-SB MIL-1553, 1 Ch Dual Redundant Summit
 PCI-1553-2-PLX-SB MIL-1553, 2 Ch Dual Redundant Summit
 PCI-1553-X-PLX-SBI as above with -40 to +85 temperature rating

Optional Accessories

EngKit-1553 2 T's, 2 Terminators, 2-1 meter cables
 CBL-1553-1 Standard-standard 2 meter 1553 cable
 CBL-1553-2 Standard-mini 2 meter 1553 cable